


Profielen

Profielen Sectie C


Productomschrijving

- Glasversterkte profielen in lengtes van 2000 mm.

D	d	D	d	D	d
6	3	42	35	76	60
12	10	44,8	40,8	76	66
15	12	48,9	44,9	76	70
18	14	50	34	80	68
20	15	50	40	80	74
22	17	50	42	88	79
24,3	20,3	50	45	101	96
26	16,5	51	44	102	92
28,4	23	53	49	108	102
28,4	24,4	55,4	49,7	120	110
30	24	60	40	127	121
32,5	28,5	60	48	160	120
36,6	32,6	60	52	169	149
40	20	60	54	169	153
40	35	60	55	180	170
40,7	36,7	60	56	250	240



a	b	s1	s2	a	b	s1	s2
30	15	2	2,5	70	70	2,5/5	2,5/5
30	30	2,5	2,5	80	47	3	3
40	20	2	2,5	82	32	2,8	4
50	20	2,5	3	82	32	4	8
50	50	5	5	100	30	3	3
58	25	3	3	150	100	3	3
60	30	2,5	3	150	100	5	6
70	12	2,6	2,6	200	150	3	3

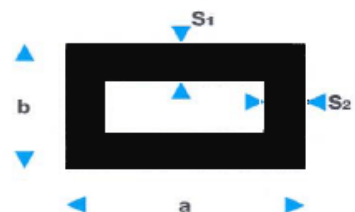

a	b	s1	s2
20	20	2	2
50	30	3	4
50	45	5	5
60	60	5	5
72	30	3,5	5
82	10	2	2
83	30	3	5
89	30	3,3	5
120	50	3	3

